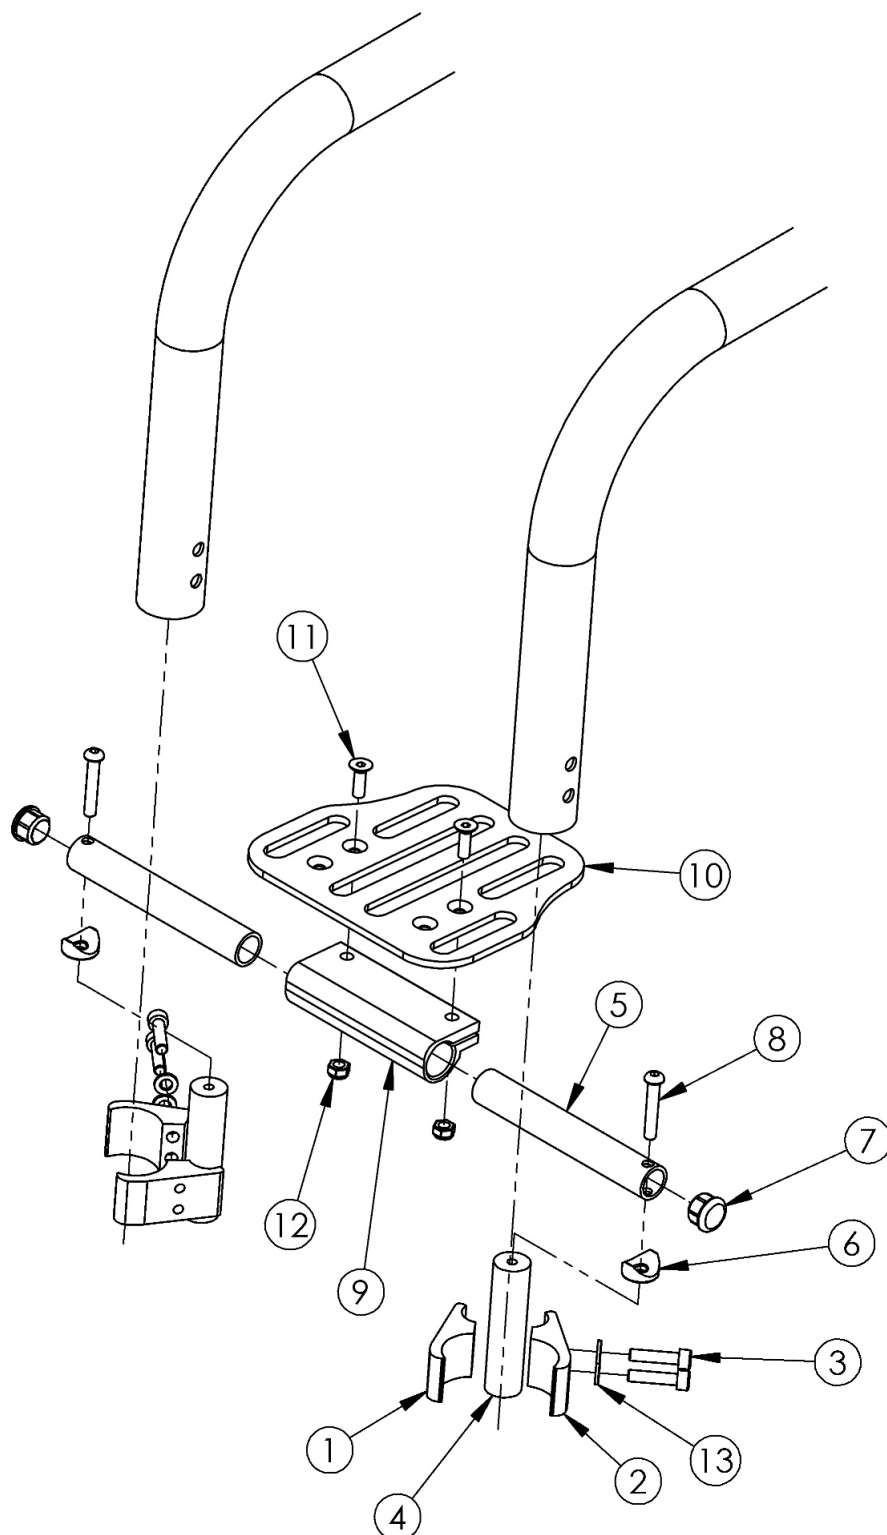# (Discontinued) Rigid High Mount Angle Adjustable Footrest 10" - 14" Wide

Footrest assemblies based on straight frame <p>

Used on serial numbers prior to TS010953, TSHD003973, TSTR004735, RGXP008523, RGX0020821, and RG0018443

Item Number	Part Number	Description	Quantity	Retail
1-4, 5a, 6-9, 10a, 11-13	501004	Footrest Assembly Angle Adj High Mount 10 Rigid	1	$283.83
1-4, 5b, 6-9, 10a, 11-13	500764	Footrest Assembly Angle Adj High Mount 11 Rigid	1	$283.83
1-4, 5c, 6-9, 10b, 11-13	500765	Footrest Assembly Angle Adj High Mount 12 Rigid	1	$271.51
1-4, 5d, 6-9, 10c, 11-13	500766	Footrest Assembly Angle Adj High Mount 13 Rigid	1	$290.98
1-4, 5e, 6-9, 10d, 11-13	503665	Footrest Assembly Angle Adj High Mount 14 Rigid	1	$271.51
1	000376	Clamp Top 1.375" Rigid	2	$13.91
2	000377	Clamp Bottom 1.375" Rigid	2	$13.91
3	100780	M6 x 25 SHCS ZC	4	$2.10
4	000600	Rigid Footplate Riser 3"	2	$34.80
5a	001422	Footrest Tube 2.8" Rigid	2	$12.75
5b	001423	Footrest Tube 3.3" Rigid	2	$12.75
5c	000688	Footrest Tube 3.8" Rigid	2	$12.75
5d	000689	Footrest Tube 4.3" Rigid	2	$12.75
5e	000690	Footrest Tube 4.8" Rigid	2	$12.75
6	000053	Saddle 3/4"	2	$1.58
7	100638	Tube End Plug 3/4"	2	$2.10
8	100797	M6 x 40 BHCS BLK ZC	2	$1.05
9	100789	Footrest Adjustable Clamp 5"	1	$29.23
10a	000225	Footrest Platform Angle Adjustable 6"	1	$78.61
10b	001322	Footrest Platform Angle Adjustable 7"	1	$66.30
10c	000226	Footrest Platform Angle Adjustable 8"	1	$85.76
10d	001323	Footrest Platform Angle Adjustable 9"	1	$66.30
11	100662	M6 x 25 FSHCS BLK ZC	2	$1.58
12	100658	M6 Nylock Nut Blk Zn	2	$1.05
13	101835	M6 Lock Washer Blk Zn	4	$0.53

Ki Mobility

Point B
(Where yardsticks meet - measurement is taken at the bottom of the horizontal yardstick)

Distance between Point A and Point B = Footplate Length

NOTE: The yardstick on the top plane of the seat frame must lie flat against frame. The yardstick going from the footplate to the second yardstick must be square against the hanger tube.

Point A
(First point of contact on footplate)

Focus
(Liberty FT uses same procedure)

Distance between Point A and Point B = Footplate Length

NOTE: The yardstick on the top plane of the seat frame must lie flat against frame. The yardstick going from the footplate to the second yardstick must be square against the front tube.

Point B
(Where yardsticks meet - measurement is taken at the bottom of the horizontal yardstick)

Point A
(First point of contact on footplate)

Rigid

Distance between Point A and Point B = Footplate Length

NOTE: The yardstick on the top plane of the hanger must lie flat against hanger. The yardstick going from the footplate to the second yardstick must be square against the hanger tube.

Point B
(Where yardsticks meet - measurement is taken at the bottom of the horizontal yardstick)

Point A
(First point of contact on footplate)

Catalyst